



petrol lawn mower

original operating instructions

models:

GBD-46R (DYM1676CE-3)

GBD-46REV (DYM1676SED-3)

GBD-51REV (DYM1678SD-3)

GBD-51R (DYM162601)



Manufactured by

Ningbo Daye Garden Machinery Co., Ltd.
No.58 Jinfeng Road
Yuyao, Zhejiang 315403
P.R. China

Imported by

Daye Europe GmbH
Parkstraße 1a
66450 Bexbach
Germany



WARNING:

For your own safety, please read this manual before attempting to operate your new unit. Failure to follow these instructions can result in serious personal injury. Spend a few moments to familiarize yourself with your mower before each use. Keep this manual in a safe place, so that the information is available anytime. If you give the equipment to any other person, hand over these operating instructions and safety regulations as well.

Intended use

The equipment may only be used for the purpose it is designed for. Any other use is deemed to be a case of misuse. The operator, and not the manufacturer, will be liable for any resulting damage or injuries of any kind.

The petrol lawn mower is intended for private use, i.e. for use in home and gardening environments.



Private use of the lawn mower refers to an annual operating time up to of 50 hours, during which time the machine is primarily used to maintain small-scale, residential lawns and home/ hobby gardens. Public facilities, sports grounds and agricultural or forestry applications are excluded.

Please note that our equipment has not been designed for use in commercial, trade or industrial applications. Our warranty will be void if the machine is used in a commercial, trade or industrial business or for equivalent purposes.

The operating instructions as supplied by the manufacturer must be kept and referred to in order to ensure that the lawn mower is properly used and maintained. The instructions contain valuable information on operating, maintenance and servicing conditions.

Important! Due to the high risk of body injury to the user, the lawn mower may not be used to trim bushes, hedges or shrubs, to cut scaling vegetation, planted roofs or balcony-grown grass, to clean (suck up) dirt and debris off walkways, or to chop up tree or hedge clippings. Moreover, the lawn mower may not be used as a power cultivator to level out elevated soil pieces such as molehills.

For safety reasons, the lawn mower may not be used as a drive unit for other work tools or toolkits of any kind.

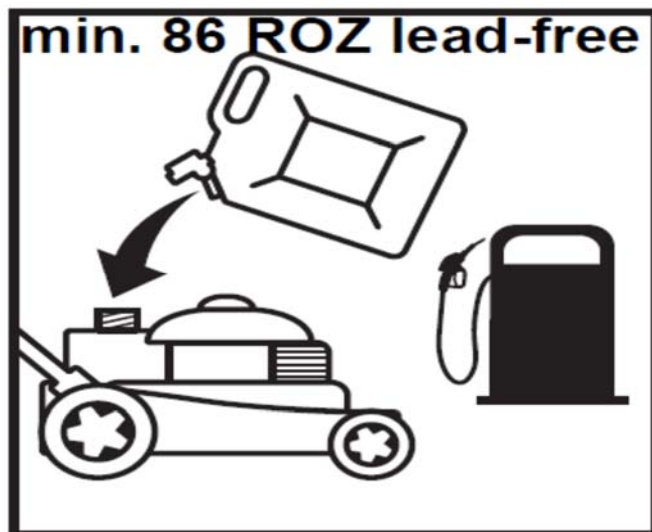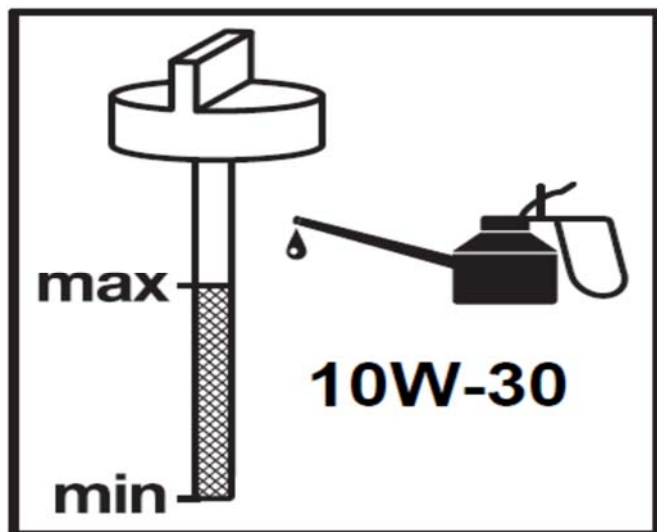

CONTENTS

SECTION .1	SYMBOLS MARKED ON THE PRODUCT	4
SECTION 2	GENERAL SAFETY RULES	4
SECTION 3	PARTS DESCRIPTION	7
SECTION 4	TECHNICAL DATA	8
SECTION 5	ASSEMBLY	9
SECTION 6	“3 IN 1”	12
SECTION 7	OPERATING INSTRUCTIONS	13
SECTION 8	MAINTENANCE INSTRUCTIONS	20
SECTION 9	LUBRICATION INSTRUCTIONS	21
SECTION 10	CLEANING	21
SECTION 11	CHARGING THE STARTER BATTERY	23
SECTION 12	STORAGE INSTRUCTIONS (OFF SEASON)	24
SECTION 13	TROUBLESHOOTING	26
SECTION 14	WARRANTY	27
SECTION 15	ENVIRONMENT	28
SECTION 16	EC-DECLARATION OF CONFORMITY	29



WARNING:

For your own safety please read this manual before attempting to operate your new unit. Failure to follow instructions can result in serious personal injury. Spend a few moments to familiarize yourself with your mower before each use.

When you unpack the lawn mower, pay close attention not to twist or bend the cables and not to pull the appliance on the cords. That may lead to irreversible damages that are not subject to warranty.

NEVER START THE ENGINE BEFORE YOU FILL OIL IN.

1. SYMBOLS MARKED ON THE PRODUCT



Figure 1: Symbols marked on the rear cover



Figure 2: Safety label

- B1 Read operating instructions.
- B2 Keep bystanders away.
- B3 Risk of injury to hands and feet.
- B4 Flammable fuel. Keep fire away. Do not add fuel on running machine.
- B5 Toxic fumes. Don't operate in closed rooms.
- B6 Wear glasses and ear plugs during operation.
- B7 High-current electric ignition circuit. Remove spark plug for maintenance.
- B8 Caution: Engine hot.

Sharp knives can cause severe injuries or even amputate limbs.

KEEP HANDS AND FEET AWAY.

Warning: Keep the safety signs clear and visible on the equipment. Replace the safety signs if they are missing or illegible.

2. GENERAL SAFETY RULES

Your safety and the safety of others are very important. We have provided important safety messages in this manual and on the engine. Please read these messages carefully.

A safety message alerts you to potential hazards that could hurt you or others. Each safety message is preceded by a safety alert symbol  and one of three words: **DANGER**, **WARNING** or **CAUTION**.

These signal words mean:

-  **DANGER:** You WILL be KILLED or SERIOUSLY HURT if you don't follow instructions.
-  **WARNING:** You CAN be KILLED or SERIOUSLY HURT if you don't follow instructions.
-  **CAUTION:** You CAN be HURT if you don't follow instructions.

Each message tells you what the hazard is, what can happen, and what you can do to avoid injury.

WARNING: When using petrol tools, basic safety precautions, including the following, should always be followed to reduce the risk of serious personal injury and/or damage to the unit. Read all these instructions prior to operating this product and retain these instructions for future reference.

WARNING: This machine produces an electromagnetic field during operation. This field may, under some circumstances, interfere with active or passive medical implants. To reduce the risk of serious or fatal injury, we recommend persons with medical implants to consult their physician and the medical implant manufacturer before operating this machine.

Training

- Read the instructions carefully. Be familiar with the controls and the proper use of the equipment.
- Never allow children or people unfamiliar with these instructions to use the lawn mower. Local regulations may restrict the age of the operator.
- Never mow while people, especially children, or pets are nearby.
- Keep in mind that the operator or user is responsible for accidents or hazards occurring to other people or their property.
- The operators must receive proper training in the use, adjustment and operation of the machine, including prohibited operations.

Preparation

- In operation, always wear sturdy footwear and long trousers. Do not operate the equipment barefoot or wearing open sandals.
- Thoroughly inspect the area where the equipment is to be used and remove all objects, such as stones, toys, sticks and wires, which can be whirled up by the machine.
- **WARNING:-** Petrol is highly flammable.



- Store fuel in sealable canisters specially designed for this purpose.
- Refuel outdoor only and do not smoke while refueling.
- Add fuel before starting the engine. Never remove the cap of the fuel tank or add petrol while the engine is running or when the engine is hot.
- If petrol is spilled, do not attempt to start the engine. Ignition sparks may lead to an explosion. Move the machine away from the area of spillage and avoid creating any source of ignition until petrol vapors have dissipated.
- Close all fuel tank and container caps securely.

- **WARNING:** Improper maintenance to this engine, or failure to correct a problem before operation, can cause a malfunction in which you can be seriously hurt or killed. Always perform a preparation inspection before each operation, and correct any problem.



Always check the following items before you start the engine:

1. fuel level • 2. oil level • 3. air cleaner • 4. fluid leaks and loose or damaged parts

- Replace faulty silencers.
- Before each use, always visually inspect the blade and blade bolts on traces of wear or damages. Replace worn or damaged blades and bolts in sets to preserve the balance.

Operation

WARNING: Your engine's exhaust contains poisonous carbon monoxide. Carbon monoxide gas is toxic.



Breathing it can cause unconsciousness and even kill you. Do not run the engine without adequate ventilation, and never run the engine indoors.

- **WARNING:** Do not use the lawnmower during lightning.
- **DANGER:** The engine and exhaust become very hot during operation. Keep the engine at least 1 meter away from buildings and other equipment during operation. Keep flammable materials away, and do not place anything on the engine while it is running.



- It is recommended to limit the duration of operation in order to minimize the risks from noise and vibration.
- Be careful when using the lawnmower in slopes and near drop-offs, ditches or embankments.
- Mow only in daylight.

- Avoid operating the equipment in wet grass.
- Watch your steps on slopes.
- Walk, never run.
- Mow across slopes, never up and down.
- Exercise extreme caution when changing direction on slopes.
- Do not mow excessively steep slopes.
- Use extreme caution when reversing or pulling the lawn mower towards you.
- Stop the blade if the lawn mower has to be tilted for transportation when crossing surfaces other than grass, and when transporting the lawn mower to and from the area to be mown.
- Never operate the lawn mower with defective guards, e.g. deflectors and/or grass catchers.
- **Caution:** The lawnmower must not be operated without either the grass catcher or self-closing discharge opening guard in place.
- Do not change the speed governor of the engine.
- The lawnmower safety systems or features shall not be tampered with or disabled.
- Disengage all and drive clutches before starting the engine.
- Start the engine carefully according to instructions and with feet well away from the blade.
- Do not tilt the lawn mower when starting the engine.
- Do not start the engine when standing in front of the discharge chute.
- Do not put hands or feet near or under rotating parts. Keep clear of the discharge opening at all times.
- Never pick up or carry a lawn mower while the engine is running.
- Stop the engine and disconnect the spark plug wire, make sure that all moving parts have come to a complete stop and, where a key is fitted, remove the key
 - before clearing blockages or unclogging the discharge chute;
 - before checking, cleaning or working on the lawn mower;
 - after having hit a foreign object. Inspect the lawnmower for damage and make repairs before restarting and operating the lawn mower.
 - If the lawn mower starts to vibrate abnormally (immediate check necessary);
 - before refueling.

Maintenance and storage

- Keep all nuts, bolts and screws tight to ensure a safe working condition.
- Be sure there is adequate ventilation whenever you operate or service the engine.
- Never store the equipment with petrol in the tank inside a building.
- Allow the engine to cool down before storage. Clean and maintain the lawnmower before storage.
- To reduce fire hazard, keep the engine, silencer and petrol tank area free of grass, leaves or resin.
- Regularly check the grass catcher for wear or deterioration.
- Replace worn or damaged parts.
- If the fuel tank has to be drained, do so only outdoors. Allow it to cool down for at least 15 minutes first.
- Improper maintenance, use of non-conform replacement components, or the removal or modification of safety components can damage the lawnmower and lead to serious injuries or death.
- Only use the blades and spare parts recommended by the manufacturer. The use of counterfeit parts can damage the machine and injure the operators. Keep the lawnmower in good working condition.
- If the blade doesn't immediately stop on stopping the engine, please contact the service center.



DANGER: Do not touch the rotating blade.



WARNING: Refuel in a well ventilated area with the engine stopped.

3. PARTS DESCRIPTION



Figure 4: **GBD-46R** (DYM1676CE-3)

Figure 3: **GBD-46REV** (DYM1676SED-3)

GBD-51REV (DYM1678SD-3)

1. upper handle	2. self-drive control handle	3. starter handle	4. quick release skewer	5. grass catcher	6. height adjustment lever
7. wheel	8. oil filler pipe & dipstick	9. deck	10. spark plug	11. fuel tank cap	12. cable clamp
13. choke lever	14. brake control handle	15. air filter	16. carburetor	17. muffler	18. water hose connector
		19. side discharge wedge	20. side discharge flap	21. speed adjustment	22. mulching wedge

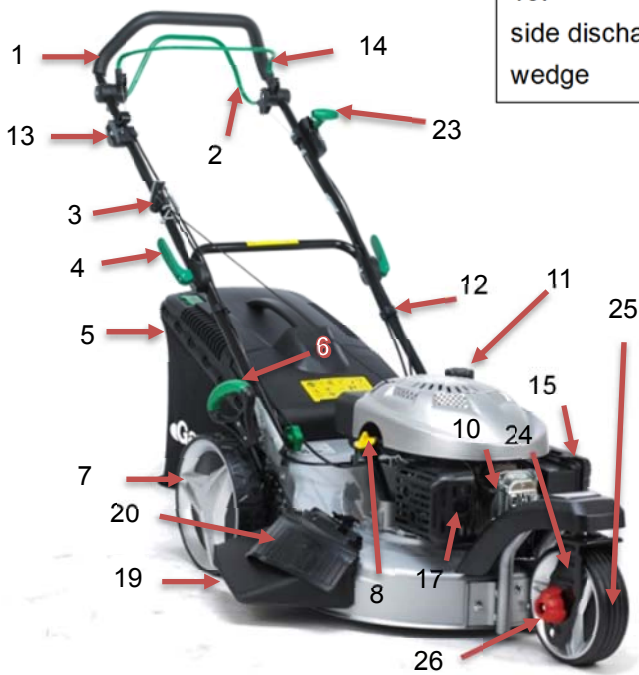


Figure 8: **GBD-51R** (DYM162601)

23. front wheel locking handle	24. front wheel bracket
25. front wheel	26. height adjustment knob

4. TECHNICAL DATA

model	GBD-46R (DYM1676CE-3)	GBD-51R (DYM162601)	GBD-46REV (DYM1676SED-3)	GBD-51REV (DYM1678SD-3)
engine type	DG600	DG600	DG600E (DYM1P70FE)	DG600E (DYM1P70FE)
engine build	4-stroke, overhead valve, single cylinder			
engine displacement (bore & stroke)	173 cm ³ (70 * 45 mm)			
nominal power	3.6 kW			
blade length	460 mm	510 mm	460 mm	510 mm
max. torque	9.5 Nm at 2700 min ⁻¹			
cooling system	forced air			
lubrication systems	forced splash			
starting method	recoil starter		electric & recoil starter	
electric starter battery	—		12 V, 4.5 Ah • type FM1545	
charger for electric starter battery	—		Input: 100 – 240 V AC, 50 – 60 Hz, 0.32 A Output: 13.8 V DC, 0.5 A Type: HYCH0131380500G	
ignition system	TCI			
PTO shaft rotation	counter-clockwise			
spark plug gap	0.7 - 0.8 mm			
rated speed	2800 min ⁻¹			
valve clearance (cold)	0.1 - 0.15 mm			
fuel tank capacity	1.8 l			
motor oil quantity needed	0.4 l			
grass catcher capacity	60 l			
net weight	36.0 kg	39.2 kg	38.0 kg	42.3 kg
height adjustment	25 - 75mm, 7 positions	25 – 75 mm, 6 positions	25 - 75mm, 7 positions	25 – 75 mm, 7 positions
guaranteed sound pressure level at the operator's position (according to EN ISO 5395-1 annex F & EN ISO 5395-2, EN ISO 4871	83.7 dB(A) K = 3 dB(A)	83 dB(A) K = 3 dB(A)	83.7 dB(A) K = 3 dB(A)	81.9 dB(A) K = 3 dB(A)
measured sound power level	93.9 dB(A) K = 1.81 dB(A)	96.4 dB(A) K = 1.80 dB(A)	93.9 dB(A) K = 1.81 dB(A)	95.0 dB(A) K = 2.88 dB(A)
guaranteed sound power level (according to 2000/14/EC)	96 dB(A)	96 dB(A)	96 dB(A)	98 dB(A)
vibration (according to EN ISO 5395-1 annex G & EN ISO 5395-2)	5.37 m/s ² K = 1.5 m/s ²	11.40 m/s ² K = 1.5 m/s ²	5.37 m/s ² K = 1.5 m/s ²	3.37 m/s ² K = 1.5 m/s ²

5. ASSEMBLY

5.1 FOLDABLE HANDLE

1. Fix the lower handlebars into the unit body with bolts, washers and locking knobs (fig. 9 & 10).
2. Open the two quick release skewers to unfold the upper handlebar (fig. 11).
3. Bring the the upper handlebar in the operating position. Close the two quick release skewers (fig. 9 & 10).
4. Adjust the tension by turning the lock nut with a wrench (fig. 12).
5. Attach the cable clamp at the shown position with the bowden cables underneath (fig. 13).

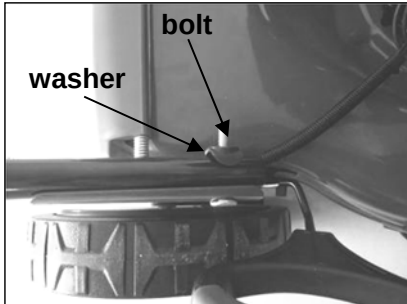


Figure 9

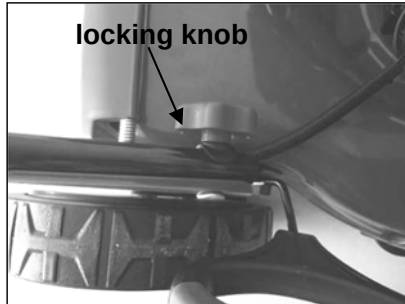


Figure 10

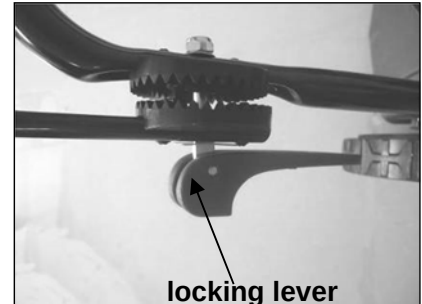


Figure 11

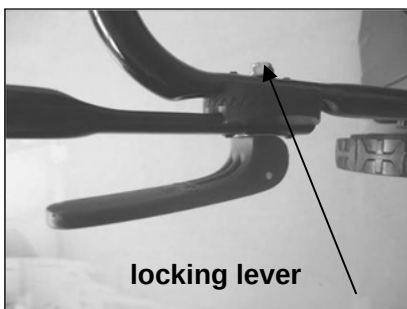


Figure 12


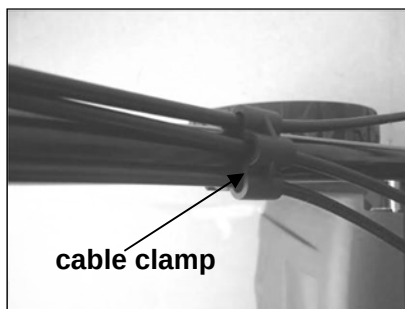


Figure 13

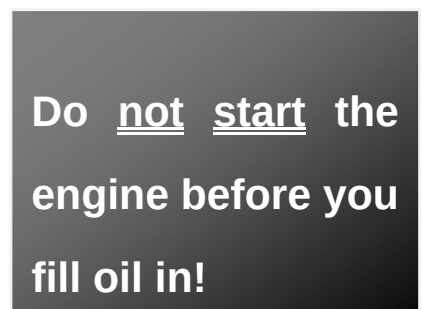

5.2 ADJUST HANDLE TO BODY HEIGHT

1. Open the two quick release skewers to unfold the upper handlebar .
2. Rotate the upper handle centered in the angle adjusting to an ergonomic height.
3. Push the locking lever closed to connect the lower handle and the upper handle.

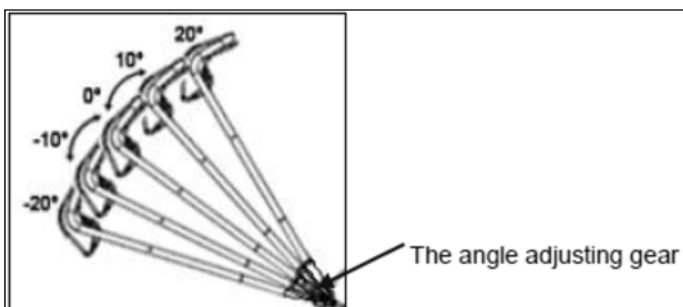


Figure 14

5.3 MOUNTING AND DISMOUNTING THE GRASS CATCHER

1. To fit: Raise the rear cover and hitch the grass catcher to the rear of mower (fig.13-18).
2. To remove: Lift the rear cover. Lift up the grass catcher.



Figure 15

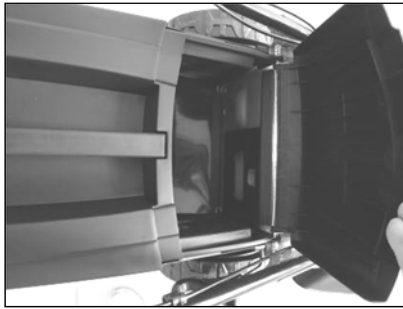


Figure 16



Figure 17

5.4 STARTER HANDLE

Gently pull out the starter handle from the engine to the rope guide (fig. 18 & 19).

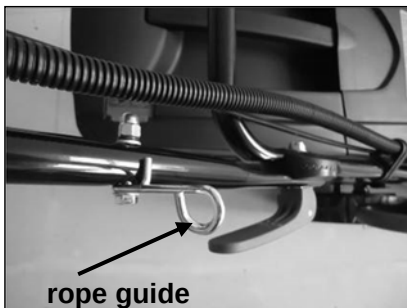


Figure 18

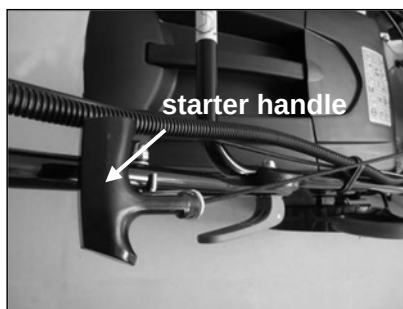


Figure 19

5.5 HEIGHT OF CUT

5.5.1 for all models

Apply outward pressure to disengage the lever from the right rear wheel rack. Move the lever forward or backwards to adjust the cutting height. The setting applies to all 4 wheels with one lever (fig. 20).



Figure 20

5.5.2 for GBD-51R (DYM162601)

For this model, the central height adjustment only applies to the rear wheels. The front wheel is also equipped with a height adjusting system (25 mm to 75 mm). Lift the mower up on front. Unscrew the height adjustment knob #26. Insert the axle into the appropriate hole in the bracket for your desired height. Tighten the knob.



Holes for different mowing heights. The height in mm is embossed in the bracket.

Figure 21

Set the front wheel to the same height as the back wheels!

5.6 HANDLE PANEL

5.6.1 for GBD-46R (DYM1676CE-3)

This model is equipped with a storage box. Push the button in the center to open and lock it (fig. 22).



Figure 22

5.6.2 for GBD-46REV (DYM1676SED-3) & GBD-51REV (DYM1678SD-3)

This model is equipped with a starter battery located in the center of the dashboard. It has got a cup & bottle holder, too.



Figure 23

Please always put a lid on the drinks in the cupholder.

6. "3 IN 1"

Your lawn mower is equipped with accessories to be retrofitted based on the application purpose:

- | | | |
|--------------------|--|-----|
| 1. normal function | rear discharge into grass catching bag | #5 |
| 2. mulching mower | mulching plug | #22 |
| 3. side-discharge | side discharge wedge | #19 |

What is mulching?

When mulching, the grass is simultaneously cut and finely chopped and returned to the grass strip as natural fertilizer.

Hints for mulch-mowing

- Cut-back by max. 2 cm (e.g. from 6 cm to 4 cm grass height).
- Use a sharp cutting knife.
- Do not mow wet grass.
- Regularly clean mulching wedge, housing inner side and mowing blade.

6.1 mulching mower



WARNING: Operate only with a stopped motor.

1. Lift the rear cover and remove the grass catcher #5.
2. Push the mulching wedge #22 into the deck. Lock the mulching wedge with the button into the opening on the deck (fig. 24, 25).
3. Lower the rear cover again (fig. 26).

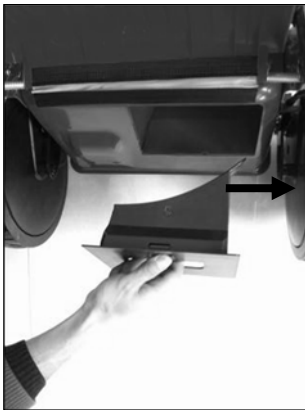


Figure 24

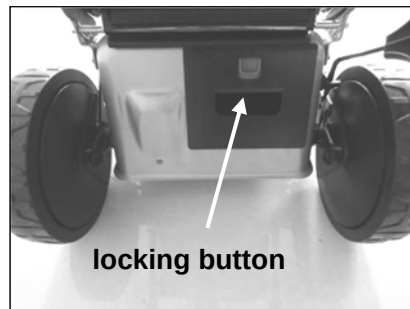


Figure 25



Figure 26

6.2 side discharge mowing



WARNING: Operate only with a stopped motor.

1. Lift the rear cover and remove the grass catcher #5 (see 6.1).
2. Install the mulching wedge #22.
3. Unlock the lid #20 (fig. 27).
4. Lift the lid #20 (fig. 28).
5. Mount the side discharge channel #19 on the support pin of the sideward flap (fig. 29).
6. Lower the flap - the flap lies on the side discharge channel (fig. 30)

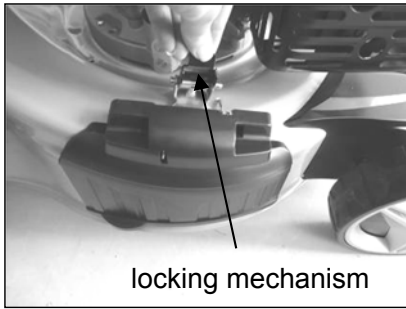


Figure 27



Figure 28

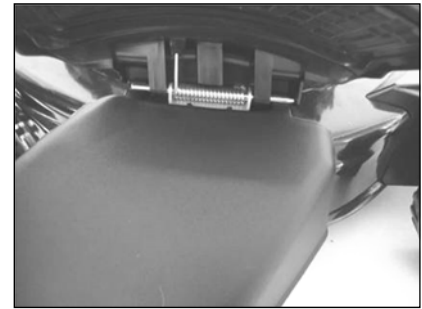


Figure 29



Figure 30

6.3 rear discharge into grass catcher

⚠ WARNING: Operate only with a stopped motor.

To return back to normal mowing, remove the mulching wedge and the side discharge accessory and store them for later usage.

7. OPERATING INSTRUCTIONS

7.1 BEFORE STARTING


7.1.1 Adding oil

⚠ CAUTION: This engine is delivered without oil. Starting the engine without oil will destroy it.

Be sure to put oil in the engine before starting. Use a clean and high-quality oil SAE30 and API.SG, SH or SJ classification.

Use 4-stroke motor oil that meets or exceeds the requirements for API service classification SH, SJ, or equivalent. Always check the API service label on the oil container to be sure it includes the letters SH, SJ, or equivalent.


SAE 10W-30 is recommended for general use. Other viscosities shown in the chart may be used when the average temperature in your area is within the indicated range.

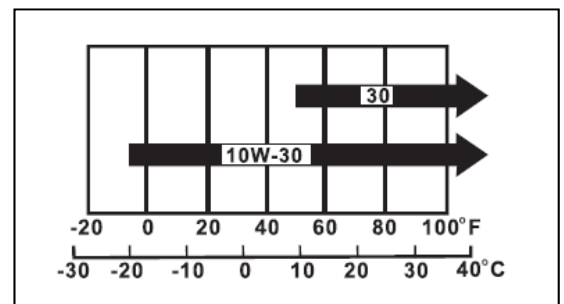

Engine oil capacity: 0.6 l

7.1.2 Oil level check

1. Check oil level when engine is stopped.
2. Remove the oil filler cap/ dipstick and wipe it clean.
3. Insert the oil filler cap/ dipstick into the oil filler neck without screwing it in; remove it to check the oil level.
4. If the oil level is near or below the lower limit mark on the dipstick, refill with the recommended oil to the upper limit mark (bottom edge of the oil fill hole). Do not overfill.
5. Reinstall the oil filler cap/ dipstick.

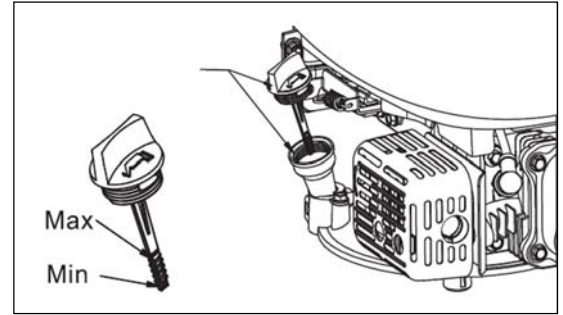

7.1.3 Adding fuel

⚠ DANGER! Petrol is highly flammable.

Completely read the GENERAL SAFETY RULES (pages 4-6 in this manual).

Use unleaded gasoline with a pump octane rating of 86 or higher. This engine is certified to operate on unleaded gasoline. Unleaded gasoline produces fewer engine and spark plug deposits and extends exhaust system life.

Never use an oil/ gasoline mixture.

- Stop engine and keep heat, sparks, and open fire away.
- Refuel only outdoors.
- Wipe up spills immediately.

Fuel can damage paint and some types of plastic. Be careful not to spill fuel when filling your fuel tank. Damage caused by spilled fuel is not covered under warranty. Never use stale or contaminated gasoline. Avoid getting dirt or water in the fuel tank.

1. Remove the fuel cap.
2. Add fuel to the bottom of the fuel level limit in the neck of the fuel tank.
3. Do not overfill. Wipe up spilled fuel before starting the engine.
4. Install and tighten the fuel cap.
5. **Fuel tank capacity: 1.8 l**

7.2 START ENGINE AND ENGAGE BLADE

7.2.1 for GBD-46R (DYM1676CE-3) & GBD-51R (DYM162601)

1. The unit is equipped with a rubber tip #10 on the spark plug, make sure it is fastened securely.
2. Open the fuel valve (fig. 31). Set it to the “” position.
3. For a cold start, turn the choke lever #13 to “” position. Immediately after the engine starts turning, turn the choke lever to the “” position (fig. 32/ 33).
4. Standing behind the unit, push & hold the brake control handle against the upper handle (fig. 34).
5. Pull out the starter handle slowly until you feel a resistance in the rope. Then completely pull the rope out with one fast movement. Once the engine starts, return it slowly to the rope guide bolt (fig. 35). Release the brake control handle to stop engine and blade.
6. After having finished to mow, please turn the fuel lock to the “” position (fig. 36).



Figure 31



Figure 32. **GBD-46R** (DYM1676CE-3)

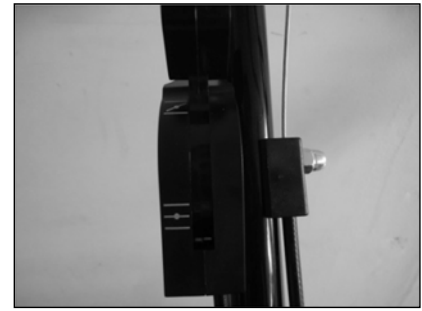


Figure 33: **GBD-51R** (DYM162601)



Figure 34: **GBD-46R** (DYM1676CE-3)



Figure 35: **GBD-51R** (DYM162601)



Figure 36

7.2.1 for GBD-46REV (DYM1676SED-3) GBD-51REV (DYM1678SD-3)

7.2.1.1 starting manually

1. The unit is equipped with a rubber tip #10 on the spark plug, make sure it is fastened securely.
2. Open the fuel valve (fig. 31). Set it to the “” position.
3. For a cold start, turn the choke lever #13 to “” position. Immediately after the engine starts turning, turn the choke lever to the “” position (fig. 37).
4. Standing behind the unit, push & hold the brake control handle against the upper handle (fig. 34).
5. Pull out the starter handle slowly until you feel a resistance in the rope. Then completely pull the rope out with one fast movement. Once the engine starts, return it slowly to the rope guide bolt (fig. 38). Release the brake control handle to stop engine and blade.
- 6 After having finished to mow, please turn the fuel lock to the “”.position (fig. 36).



Figure 37



Figure 38

7.2.1.2 starting electrically

1. The unit is equipped with a rubber tip #10 on the spark plug, make sure it is fastened securely.
2. Open the fuel valve (fig. 39). Set it to the “” position.
3. For a cold start, turn the choke lever #13 to “” position. Immediately after the engine starts turning, turn the choke lever to the “” position (fig. 40).

4. Standing behind the unit, push & hold the brake control handle against the upper handle (fig. 41).
5. Press the starter button on the panel (fig. 42). Release it once the motor starts running. Turn the choke lever to .
Release the brake control handle to stop engine and blade.
6. After having finished to mow, please turn the fuel lock to the "  " position (fig. 43).



Figure 39



Figure 40



Figure 41

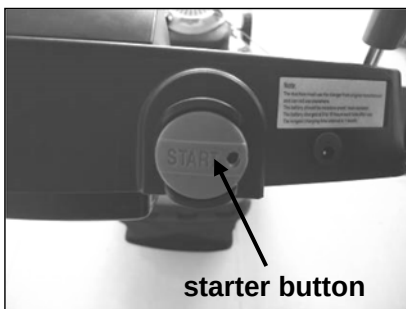


Figure 42



Figure 43

7.3 OPERATION PROCEDURE

During operation, tightly hold the brake handle with both hands.

Note: During operation, when the brake handle is released, the engine and thus the lawnmower stops to operate.

7.3.1 front wheel fixation on GBD-51R (DYM162601)

Switch the locking handle #23 to "  "position to allow the steering of the front wheel #25 (fig.44).
Switch the locking handle to "  "position to fix the wheel in a straight position (fig. 45).



Figure 44



Figure 45



WARNING: In order to avoid any unintentional start-ups of the lawn mower, it comes equipped with an engine brake which must be pulled back before the engine can be started. To mow, hold the lever in the working position. When the engine control lever is released, it must return to its initial position, at which point the engine automatically switches off and the blade stops immediately. Before you start to mow, check the

start/stop lever several times to be sure that it is working properly. Ensure that the tension cable can be smoothly operated (i.e. is not catching or kinking in any way).

7.4 STOPPING THE ENGINE

Release the brake control handle to stop the engine and blade (figure 46).

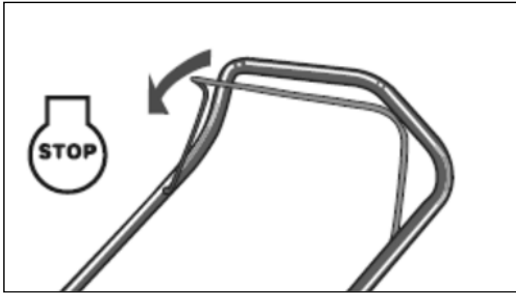


Figure 46

7.5 REAR-WHEEL DRIVE

for GBD-46R (DYM1676CE-3) & GBD-51R (DYM162601)

Grip the self-drive control handle, the lawnmower will move forward automatically with about 3.0 km/h. Release the self-drive handle, the lawnmower will stop moving (fig. 47).

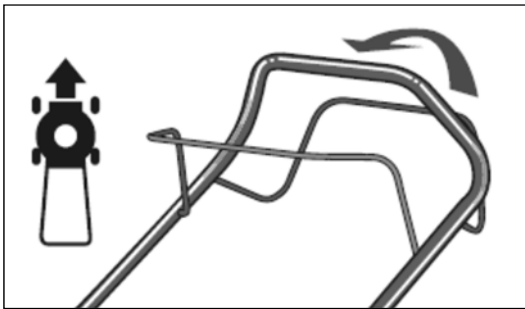


Figure 47

for GBD-46REV (DYM1676SED-3) & GBD-51REV (DYM1678SD-3)

The mower is equipped with a speed adjusting system which can adjust 4 speeds from 3.0 km/h to 4.5 km/h. Position 1: Slowest position. Position 4: Fastest position (fig. 49).

Operation steps:

1. Release the self-drive control handle #2.
2. Adjust the desired speed with handle #21.
3. Pull rasp the self-drive control handle #2. (fig. 49).

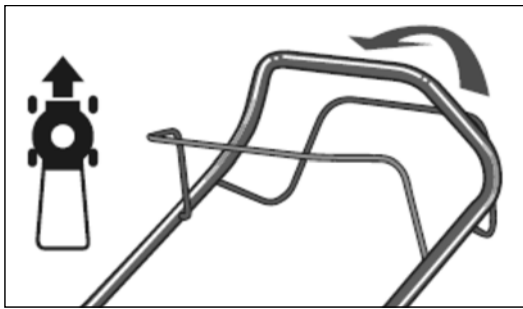


Figure 48



Figure 49



CAUTION: your mower is designed to cut normal residential grass up to 250 mm height. Do not attempt to mow through unusually tall dry or wet grass or piles of dry leaves. Debris may accumulate on the mower deck or contact the engine exhaust presenting a potential fire hazard.

7.6 OBTAINING THE BEST MOWING RESULTS

Clear the lawn from stones, branches, wire or other foreign objects. The mower could whirl these up and throw to any direction, leading to serious personal injury as well as to damage to property, surrounding objects and the mower itself. Do not cut wet grass. Wet grass clippings tend to clog the discharge opening the underside of the deck. Cut no more than 1/3 of the length of the grass. When mowing long grass you may have to cut the lawn in two stages, lowering the blade another 1/3 of the length for the second cut. Mow in a different pattern than you did the first time. To overlap the cutting tracks on each pass will also help to clean up any stray clippings. The mower must be operated at full throttle to get the best cut. Clean the underside of the deck after each use to remove grass lumps that prevent proper mulching. When mowing leaves, make sure they are dry and are not collected to large piles. (Do not wait for all the leaves to fall off the trees before you mow.)



WARNING: If you strike a foreign object, stop the engine. Remove the spark plug, thoroughly inspect the mower for any damage and repair the damage before restarting and operating the mower. Extensive vibration of the mower during operation is an indication of damage. The unit should be promptly inspected and repaired.

7.7 GRASS CATCHER

There is a level indicator on the top of the grass catcher that shows whether the catcher is empty or full.

- The level indicator moves if the catcher is not full and the mower is turned on (fig. 51).
- Once that indicator stops moving, the grass catcher is full. Turn the mower off. Empty and clean the grass catcher.

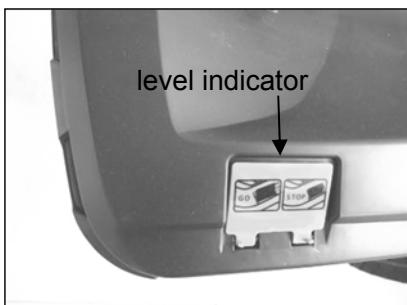


Figure 50



Figure 51

7.8 DECK

The underside of the mower deck should be cleaned after each use to remove any grass clippings, leaves and dirt. These residues contain active organic substances that favor rust and corrosion. The deck may be cleaned by tilting the mower and scraping clean with a suitable tool (make certain the spark plug is disconnected).



Always lay the mower on that side where the air filter is directed upwards. The air filter lying face down will lead to fuel and oil spills.

7.9 HEIGHT ADJUSTMENT INSTRUCTIONS

For GBD-46R (DYM1676CE-3), GBD-51REV (DYM1678SD-3), GBD-46REV (DYM1676SED-3)

Your mower is equipped with a central height adjustment lever offering 7 height positions.

Height means distance of blade to ground. It can be adjusted from 25 mm to 75 mm (7 height positions) (fig. 52) .

1. Stop the mower before changing the cutting height.
2. The central height adjustment lever offers you 7 different height positions.

To change the height of cut, squeeze the adjustment lever towards the wheel and move it left or right along the scale to your to selected height.

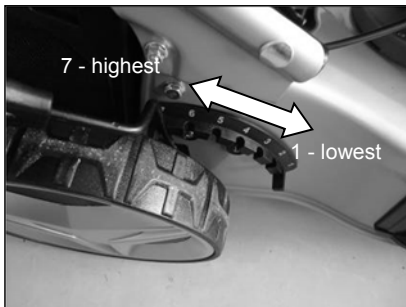


Figure 52

For GBD-51R (DYM162601)

Your mower is equipped with a height adjustment lever offering 7 height positions for the rear wheels.

Height means distance of blade to ground. It can be adjusted from 25 mm to 75 mm (7 height positions) (fig. 53) .

1. Stop the mower before changing the cutting height.
2. The central height adjustment lever offers you 7 different height positions.

To change the height of cut, squeeze the adjustment lever towards the wheel and move it left or right along the scale to your to selected height.

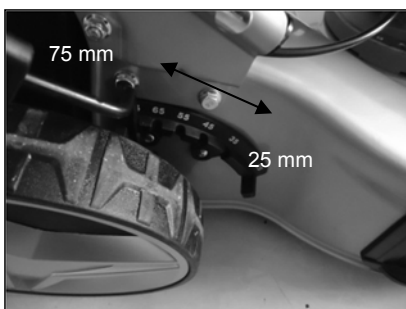


Figure 53

The front wheel needs to be adjusted separately.

- 1) Lift the mower up on the front wheel bracket #24. Pull out the support lever counterclockwise (fig. 54 & 55)).

- 2) Fix the support lever into the holder body, make sure the support lever is located in position (fig. 55 & 56).
- 3) To change the height of rear wheel, unscrew the height adjustment knob #26. Pull out the wheel axle sideward and insert it into another hole relating to the desired height. The height in millimeters is embossed in the bracket #26. Reassemble (fig. 57 & 58).



Figure 54

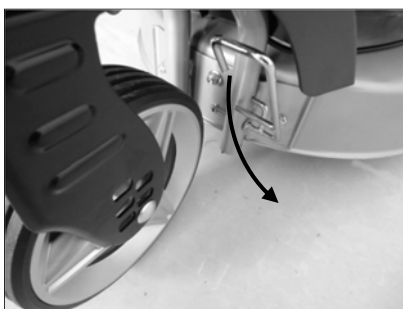


Figure 55



Figure 56

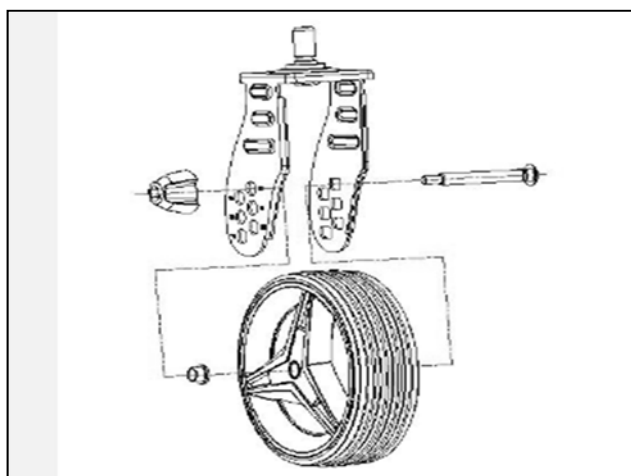


Figure 57



Figure 58



Remember the cutting height on the front wheel should be the same as on the rear wheels!

8. MAINTENANCE INSTRUCTIONS

Good maintenance is essential for safe, economical and trouble-free operation. It is also necessary to maintain the low emission level of the engine.

Remember that an authorized servicing dealer knows your engine best and is fully equipped to maintain and repair it.

SPARK PLUG

Use only original manufacturer replacement spark plugs. For best results, replace the spark plug every 100 hours of use.

Recommended spark plug ► Torch F7RTC.



WARNING: Incorrect spark plugs can cause engine damage.

For good performance, the spark plug must be properly gapped and free of deposits.

1. Disconnect the cap (part 10) from the spark plug, and remove any dirt from the spark plug area.
2. Use the spark plug wrench (accessory part A) to remove the spark plug.
3. Inspect the spark plug. Replace it damaged or corroded, if the sealing washer is in poor condition or if the electrode is worn.

4. Measure the electrode gap with a suitable gauge. Refer to the table under point 4. If adjustment is needed, correct the gap by carefully bending the side electrode.
5. Install the spark plug carefully, by hand, to avoid cross-threading.
6. After the spark plug is seated, tighten with the spark plug wrench (accessory part A).
7. When installing a new spark plug, tighten 1/2 turn after the spark plug seats to compress the washer.
8. When reinstalling the original spark plug, tighten 1/8-1/4 turn after the spark plug seats to compress the washer.



WARNING: A loose spark plug can become very hot and can damage the engine. Over-tightening the spark plug can damage the threads in the cylinder head.

9. Attach the spark plug cap onto the spark plug.

BRAKE PADS

Check and/or replace the engine brake pads in a local workshop regularly, only original parts can be used as replacement.

9. LUBRICATION INSTRUCTIONS



CAUTION: DISCONNECT SPARK PLUG BEFORE SERVICING.

1. WHEELS - Lubricate the ball bearings in each wheel at least once a season with a light oil.
2. ENGINE - Change engine oil every 25 hours when used under heavy load or in high ambient temperatures.

10. CLEANING



CAUTION: Do not spray the engine with water. Water can damage the engine or contaminate the fuel system.

1. Wipe the deck with a dry cloth.
2. Clean the underside of the deck with fluid or spraying water. Tilt the mower aside always with the air filter on the upside.

10.1 ENGINE AIR FILTER

The air cleaner system uses a filter element that should be regularly cleaned.

CAUTION: Do not allow dirt or dust to clog the air filter foam element. The engine air cleaner element must be serviced (cleaned) after 25 hours of normal mowing. The foam element must be serviced more frequently if the mower is used in dry dusty conditions.



1. Press down the two tabs on top of the filter cover (fig. 59) .
2. Remove the filter cover (fig. 59).
3. Clean the filter element with pressurized air. **DO NOT USE ANY LIQUIDS!**
4. Reinstall filter.

NOTE: Replace filter if frayed, torn, damaged or unable to be cleaned.

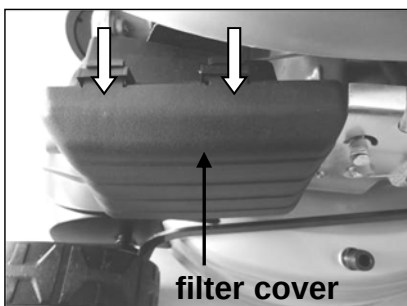


Figure 59

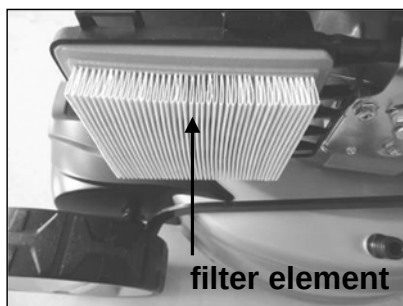


Figure 60

10.2 CUTTING BLADE

⚠ CAUTION: Be sure to disconnect and ground the spark plug wire before working on the cutting blade to prevent accidental engine starting. Protect your hands with heavy gloves before you touch the cutting blades. Tilt the mower aside always with the air filter on the upside. Remove the hexagonal screw and the washer that hold the blade and the blade adapter in place onto the engine crankshaft. Remove blade adapter from the crankshaft.

⚠ WARNING: Periodically inspect the blade adapter for cracks, especially if you strike a foreign object. Replace when necessary.

For best results your blade should be sharp. The blade may be resharpened by removing it and either grinding or filing the cutting edge keeping as close to the original bevel as possible. It is extremely important that each cutting edge receives an equal amount of grinding to prevent an unbalanced blade. Improper blade balance will result in excessive vibration causing eventual damage to the engine and mower. The blade can be tested for balance by balancing it on a round shaft screwdriver. Remove metal from the heavy side until it balances evenly.

Before reassembling the blade and the blade adapter to the unit, lubricate the engine crankshaft and the inner surface of the blade adapter with light oil. Insert the key into the blade adapter and install the blade adapter on the engine crankshaft, push the washer into the blade adapter and install the blade (figure 61). Place the blade with the part number facing away from the adapter. Align the washer over the blade and insert the hexagonal bolt. Tighten the bolt to the torque listed below:

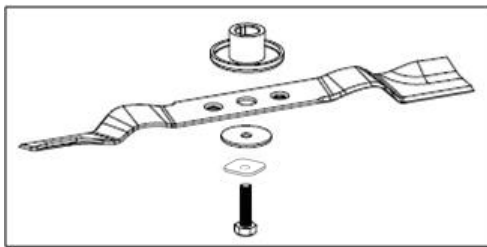


Figure 61

10.3 BLADE MOUNTING TORQUE

Center bolt 40 Nm – 50 Nm. ALL nuts and bolts must be checked periodically for correct torque.

After prolonged use, especially in sandy soil conditions, the blade will wear out and lose some of the original shape. Cutting efficiency will be reduced and the blade should be replaced. Replace with an approved factory replacement blade only. Possible damage resulting from blade unbalancing or weak material is not the responsibility of the manufacturer.

When you change the blade use the original type marked on the blade.

Model	Blade type
GBD-46R (DYM1676CE-3)	DAYE 2105200263
GBD-46REV (DYM1676SED-3)	DAYE 2105200263
GBD-51REV (DYM1678SD-3)	DAYE 2105200262
GBD-51R (DYM162601)	DAYE 2105200262

10.4 ENGINE

Inspect the oil level every time you start the engine. The oil must be refilled when the “min”-marking on the dipstick is reached. The oil must be exchanged once a year.

Service the air cleaner as instructed under 10.1.

Clean every few hours under extremely dusty conditions. Poor engine performance usually indicates that the air cleaner should be serviced.

The spark plug should be cleaned and the the electrode gap checked once a season. A spark plug replacement is recommended at the start of each mowing season. Refer to point 8 of this manual for correct plug type and electrode gap specifications.

Clean the engine regularly with a cloth or brush. Keep the cooling system (blower housing area) clean to permit proper air circulation which is essential to engine performance and life. Be certain to remove all grass and dirt from the muffler area.

In order to have a valid warranty, your lawn mower should be checked by a motorist once a season.

10.5 HOSE CONNECTOR FOR CLEANING THE DECK AND THE CUTTING BLADE

for GBD-46R (DYM1676CE-3), GBD-51R (DYM162601), GBD-46REV (DYM1676SED-3)

⚠ NOTE: Before cleaning, remove the grass.

1. Insert the hose connector into the water hose connector on the deck; ensure they are firmly connected (fig. 62).
2. Connect the other end of the hose to the water tap. Turn the water supply on.
3. Start the engine. The automatic cleaning takes place. Shut the engine off after max. 5 minutes.
4. After cleaning, take away the hose, and store it in a clean and safe place.
5. Wipe the water on the deck and the blade surface. Lightly grease the blade to avoid corrosion and rust.

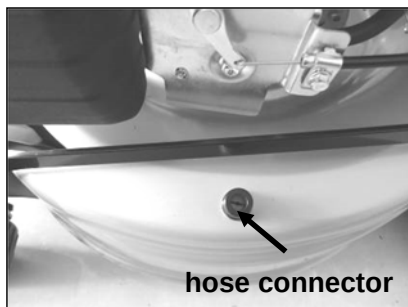


Figure 62



CAUTION: Start the engine carefully according to instructions and with feet well away from the blade.



CAUTION: Do not tilt the lawn mower when starting the engine. Start the mower on a levelled surface, free of high grass or obstacles.



CAUTION: Keep hands and feet away from the rotating parts. Do not start the engine when standing in front of the discharge opening.



WARNING: When cleaning, omit all other actions, for example mowing, mulching etc.

11. CHARGING THE STARTER BATTERY

for GBD-51REV (DYM1678SD-3), GBD-46REV (DYM1676SED-3)

The starter battery is maintenance-free and is normally charged by the lawnmower. In certain cases, however, the battery will need to be charged by the user:

- Before the initial start-up of the lawnmower.
- If discharged, before the winter season, or if left unused for long periods (> 6 months).

Charging procedure:

1. Insert the charger cable fully to the charging connector (fig. 63)
2. Connect the charger to a power socket. The mains voltage must match the operating voltage of the charger.

3. The required charging time is about 8-10 hours.



Figure 63

WARNING:



- Use only the original battery charger supplied.
- Charge the starter battery only in dry, well-ventilated rooms.
- Do not start up the lawnmower while the battery is charging.
- The longest charging time interval is 1 month.

12. STORAGE INSTRUCTIONS (OFF SEASON)

Proper storage preparation is essential for keeping your lawn mower trouble-free and looking good. The following steps will help to keep rust and corrosion from impairing your appliance's function and appearance, and will make the engine easier to start when you use it again.



CAUTION! The engine must have completely cooled down before storing the lawnmower.

The following steps should be taken to prepare the lawn mower for storage.

1. Empty the tank after the last mowing of the season.

Gasoline will oxidize and deteriorate in storage. Deteriorated gasoline will cause hard starting and gum deposits that clog the fuel system. If the gasoline in your engine deteriorates during storage, you may need to have the carburetor, and other fuel system components, serviced or replaced.

The length of time that gasoline can be left in your fuel tank and carburetor without causing functional problems will vary with such factors as gasoline blend, your storage temperatures, and whether the fuel tank is partially or completely filled.

The air in a partially filled fuel tank promotes fuel deterioration. Very warm storage temperatures accelerate that. Fuel problems may occur within a few months, or even less if the gasoline was not fresh when you filled the fuel tank.


Fuel system damage or engine performance problems resulting from neglected storage preparation are not covered under warranty.

- a) Empty the petrol tank with a suction pump or through the fuel strainer.




CAUTION! Do not drain the petrol in closed rooms, in proximity of open fire etc. Do not smoke! Petrol fumes can cause explosion or fire. Gasoline is highly flammable and explosive, and you can be burned or seriously injured when handling fuel. Stop engine and keep heat, sparks, and flame away. Refuel only outdoors. Wipe up spills immediately.

- i. Place an approved gasoline canister under the carburetor (part 16), and use a funnel to avoid spilling fuel.
- ii. Remove the drain bolt, and then move the fuel valve lever to the "ON" position.
- iii. After all the fuel has drained into the container; reinstall drain bolt and washer. Tighten the drain bolt securely.



- b) Start the engine and let it run until it has used up all remaining petrol.
 - c) Remove the spark plug. Use an oilcan to fill approx. 20 ml oil into the combustion chamber. Operate the starter to evenly distribute the oil in the combustion chamber. Replace the spark plug.
2. Clean the fuel strainer.
- i. Remove the fuel strainer from the fuel tank and fuel line.
 - ii. Clean the fuel strainer (remove dirt which has accumulated on the mesh, and check that the mesh is not broken anywhere).
 - iii. Reinstall fuel strainer (A) and fuel line.
3. Clean and grease the lawnmower carefully as described above under "Lubrication instructions".
4. Slightly grease the cutter to avoid corrosion.
5. Store the lawnmower in a dry, clean and frost-protected place, out of reach of unauthorized persons.



NOTE: When storing any type of power equipment in an unventilated or material storage shed,

- Care should be taken to rust-proof the equipment. Use a light oil or silicone, coat the equipment, especially the cables and all moving parts.
- Be careful not to bend or kink cables.
- If the starter rope becomes disconnected from rope guide on handle, disconnect and ground the spark plug wire and pull the starter rope out from engine slowly. Slip the starter rope into the rope guide bolt on handle.

Transport

Turn the engine off and allow the engine to cool down. Then disconnect the spark plug wire and empty the fuel tank according to the instructions. Ensure not to bend or damage the cutter when pushing the lawnmower over obstacles.

13. TROUBLESHOOTING

PROBLEM	PROBABLE CAUSE	CORRECTIVE ACTION
Engine does not start.	Choke lever in wrong position.	Move lever to correct position:  for starting.  for operation.
	Fuel tank is empty.	Fill tank with fuel.
	Air cleaner element is dirty.	Clean air cleaner element.
	Spark plug loose.	Tighten spark plug.
	Spark plug wire loose or disconnected from plug.	Install spark plug wire on spark plug.
	Spark plug gap is incorrect.	Set gap between electrodes.
	Spark plug is defective.	Install new, correctly gapped plug.
	Carburetor is flooded with fuel.	Remove air cleaner element and pull starter rope continuously until carburetor clears itself and install air cleaner element.
	Faulty ignition module.	Contact the service agency.
Engine difficult to start or loses power.	Dirt or water in fuel tank.	Drain fuel and clean tank. Fill tank with clean, fresh fuel.
	Ventilation hole in fuel tank cap is clogged.	Clean or replace fuel tank cap.
	Air cleaner element is dirty.	Clean air cleaner element.
	The carburetor is clogged. Wrong or dirty fuel has been used.	Remove the spark plug. Drain the fuel tank. Clean the spark plug and the carburetor. This should be done by an authorized motorist workshop.
Engine operates erratically.	Spark plug is defective.	Install new, correctly gapped plug.
	Spark plug gap is incorrect.	Set gap between electrodes.
	Air cleaner element is dirty.	Clean air cleaner element.
Engine idles poorly.	Air cleaner element is dirty.	Clean air cleaner element.
	Air slots in engine shroud are blocked.	Remove dirt from slots.
	Cooling fins under engine blower housing are blocked.	Remove dirt from cooling fins and air passages.
Engine skips at high speed.	Gap between electrodes of spark plug is too close.	Set gap between electrodes.
Engine overheats	Cooling air flow is restricted.	Remove any debris from slots in shroud, blower housing, air passages.
	Incorrect spark plug.	Install original spark plug and cooling fins on engine.
Mower vibrates abnormally	Cutting assembly is loose.	Tighten blade
	Cutting assembly is unbalanced.	Exchange blade.

14. WARRANTY

14.1 warranty in the first 2 years

Eventual faults of material or production are eliminated with repair or exchange of our choice. This product has a 24-month warranty counting from the day of first purchase. This warranty covers all defects caused by material or production. Not covered by this warranty are:

- Wear parts like
 - o knives
 - o grass catching bags
 - o wheels, wheel caps and wheel bearings
 - o drive belts, bowden cables
 - o air filters, spark plugs, carburettors
- Damages and defects that origin from improper handling, outer influence or modifications
- Damages after commercial use

What to do in case of warranty?

- Which is important: The purchase receipt must be kept as a proof for the date of first purchase. For an eventual repair please also store the original package carton. In a warranty case, please contact our customer service with this warranty sheet and a copy of your proof of purchase. We reserve the right to reject claims if the purchase cannot be substantiated or the product is obviously not properly serviced.

14.2 warranty extension to five years

Gardol extends your warranty to five years (60 months) from the first date of purchase as described under 14.1 if

- the lawn mower has had a yearly service by a certified service dealer or by Gardol's send-in repair and maintenance service,
- the below proof of maintenance is stamped in the fields provided,
- copies of the repair and/ or maintenance invoices are being presented together with your warranty claim.

PROOF OF MAINTENANCE					
item	year 1	year 2	year 3	year 4	year 5
engine oil changed					
Air filter element cleaned					
Air filter element exchanged					
Spark plug adjusted					
Spark plug exchanged					
Flywheel brake pad checked and, if necessary, exchanged					
Spark arrester cleaned and, if necessary, exchanged					
Fuel tank cleaned					
Fuel tube checked and, if necessary, exchanged					
Valve clearance checked and, if necessary, adjusted					
Combustion chamber cleaned					
nuts, bolts and screws tightened					
Blade sharpened and balanced or exchanged					
Wheel bearings and blade greased					
Other done/ remarks					
Certified workshop stamp & signature					

15. ENVIRONMENT

The unit is supplied in packaging to prevent its being damaged in transit. This packaging is raw material and can therefore be reused or can be returned to the raw material system. The unit and its accessories are made of various types of material, such as metal and plastic. Defective components must be disposed of as special waste. Ask your dealer or your local council.

16. EC-DECLARATION OF CONFORMITY

EC Declaration of Conformity				
We herewith declare,	Ningbo Daye Garden Machinery Co., Ltd., 58 Jinfeng Road, Yuyao, Zhejiang 315403, P. R. China,			
that the following machine complies with the appropriate basic safety and health requirements of the EC Directive based on its design and type, as brought into circulation by us.				
In case of alteration of the machine, not agreed upon by us, this declaration will lose its validity.				
machine Description:	Petrol Lawn Mower			
machine Type:	DYM1676CE-3	DYM1676SED-3	DYM1678SD-3	DYM162601
displacement	173 cm ³	173 cm ³	173 cm ³	173 cm ³
max. Cutting width	460 mm	460 mm	510 mm	510 mm
measured sound power level:	93.9 dB(A)	93.9 dB(A)	95.0 dB(A)	96.4 dB(A)
guaranteed sound power level:	96dB(A)			98 dB(A)
	Notified Body for EC Directive 2000/14/EC:0036 TÜV SÜD Industrie Service GmbH Westendstrasse 199 • 80686 München • Deutschland			
applicable EC Directives	EC Machinery Directive 2006/42/EC EC Directive of electromagnetic compatibility 2014/30/EU EC Directive of noise emission: 2000/14/EC			
Applicable Harmonized Standards	EN ISO 5395-1 EN ISO 5395-2 EN ISO 14982			
Authorized Signature/Date/Place	 Ningbo Daye Garden Machinery Co., Ltd. 58 Jinfeng Road, Yuyao, Zhejiang 315403, P. R. China 2018-10-16			
title of signatory	General Manager			
name and address of the person authorized to compile the technical file	Daye Europe GmbH Parkstraße 1a, 66450 Bexbach • Germany			



Österreich	bauhaus.at@daye-europe.de
België	bauhaus.be@daye-europe.de
Hrvatska	bauhaus.hr@daye-europe.de
Čeština	bauhaus.cz@daye-europe.de
Danmark	bauhaus.dk@daye-europe.de
Eesti	bauhaus.ee@daye-europe.de
Suomi	bauhaus.fi@daye-europe.de
Deutschland	bauhaus.de@daye-europe.de
Magyarország	bauhaus.hu@daye-europe.de
Ísland	bauhaus.is@daye-europe.de
Luxembourg	bauhaus.lu@daye-europe.de
Nederland	bauhaus.nl@daye-europe.de
Norge	bauhaus.no@daye-europe.de
Slovensko	bauhaus.sk@daye-europe.de
Slovenija	bauhaus.si@daye-europe.de
España	bauhaus.es@daye-europe.de
Sverige	bauhaus.se@daye-europe.de
Schweiz	bauhaus.ch@daye-europe.de
Türkiye	bauhaus.tr@daye-europe.de