

ECO LED BAJO MUEBLE


Características de Producto

- Ideal para bajo, dentro y encima de estanterías de cocina, libros, vitrinas, caravanas y casas móviles
- Cambio de temperatura de color a través del interruptor: 3000K o 4000K
- Dirección del haz de luz ajustable
- Directamente interconectables
- Vida útil de 20,000 horas
- Cuerpo de plástico y difusor de PVC
- Acabado plata
- Se incluye cable con clavija para conexión a la red
- Cable de alimentación de 1,5m, cable de interconexión de 15cm



CAT NO.	DRIVER	LÚMENES LUMINARIA	POTENCIA	EFICACIA Llm/cW	PESO (kg)	CRI	RANGO TEMP (°C)	L/B VIDA ÚTIL
ELUCA3S3SCC	Estándar	350	5W	64	0,225	>80	-25° to +40°	L70 / B50
ELUCA5S5SCC	Estándar	550	8W	63	0,345	>80	-25° to +40°	L70 / B50
ELUCA6S7SCC	Estándar	750	10W	68	0,420	>80	-25° to +40°	L70 / B50

Dimensiones

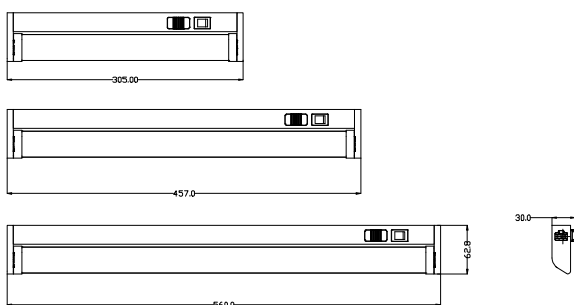

STANDARD	DESCRIPTION
EN 60598-1	Luminaire – General requirements
EN 60598-2-1	Luminaire – Fixed general purpose
EN 61000-3-2	Electromagnetic compatibility (EMC) – Part 3-2: Limits - for harmonic current emissions
EN 61000-3-3	Limits - Limitation of voltage changes, voltage fluctuations and flicker in public low-voltage supply systems, for equipment with rated current ≤ 16 A per phase and not subject to conditional connection
EN 61547	Equipment for general lighting purposes – EMC immunity requirements
EN 55015	Limits and methods of measurement of radio disturbance characteristics of electrical lighting and similar equipment

