

PANEL DE ILUMINACIÓN




Características de Producto

- Perfil súper delgado perfecto para las aplicaciones de iluminación más discretas.
- Última tecnología LED proporciona el máximo ahorro de energía y la salida de luz instantánea.
- Directamente interconectable de extremo a extremo o con cables accesorios para instalaciones rectas o en ángulo - interconectables hasta 3.
- Interruptor de sensor de movimiento para encendido/apagado y atenuación.
- Se incluye cable con clavija para conexión a la red
- Cable de alimentación de 1m



CAT NO.	PACK	DRIVER	LÚMENES LUMINARIA	POTENCIA	CCT	EFICACIA Llm/cW	PESO (kg)	CRI	RANGO TEMP (°C)	L/B VIDA ÚTIL
LUCP50WH30P	Kit Starter	Dimmable	600	10W	3000K	60	0,203	>80	-25° to +40°	L70 / B50
LUCP50WH40P	Kit Starter	Dimmable	600	10W	4000K	60	0,389	>80	-25° to +40°	L70 / B50
LUCP50WH30	Kit Ampliación	Dimmable	600	8W	3000K	75	0,203	>80	-25° to +40°	L70 / B50
LUCP50WH40	Kit Ampliación	Dimmable	600	8W	4000K	75	0,389	>80	-25° to +40°	L70 / B50

Dimensiones

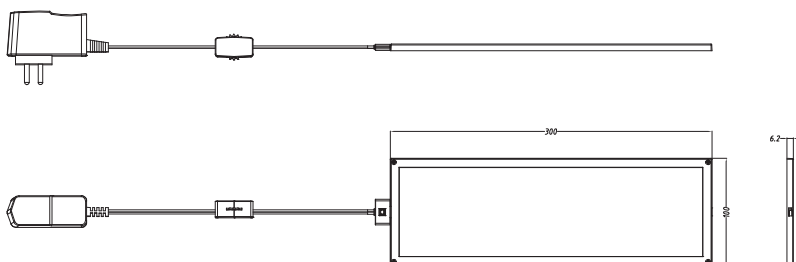

STANDARD	DESCRIPTION
EN 60598-1	Luminaires – General requirements
EN 60598-2-1	Luminaires – Fixed general purpose
EN 61000-3-2	Electromagnetic compatibility (EMC) – Part 3-2: Limits - for harmonic current emissions
EN 61000-3-3	Limits - Limitation of voltage changes, voltage fluctuations and flicker in public low-voltage supply systems, for equipment with rated current ≤ 16 A per phase and not subject to conditional connection
EN 61547	Equipment for general lighting purposes – EMC immunity requirements
EN 55015	Limits and methods of measurement of radio disturbance characteristics of electrical lighting and similar equipment

