

ECO LED COCINA LUZ DE TECHO


Características de Producto

- Recomendado para iluminación en cocinas
- Iluminación homogénea
- Cuerpo metálico y difusor de metacrilato
- Vida útil de 20,000 horas
- Cuerpo de plástico y difusor de PC
- Acabado blanco



CAT NO.	DRIVER	LÚMENES LUMINARIA	POTENCIA	EFICACIA Llm/cW	PESO (kg)	CRI	RANGO TEMP (°C)	L/B VIDA ÚTIL
EUB6W16S40	Estándar	1500	18W	76	0,181	>80	-25° to +40°	L70 / B50
EUB12W32S40	Estándar	3000	36W	76	0,370	>80	-25° to +40°	L70 / B50
EUB15W40S40	Estándar	4000	50W	73	0,470	>80	-25° to +40°	L70 / B50

Dimensiones

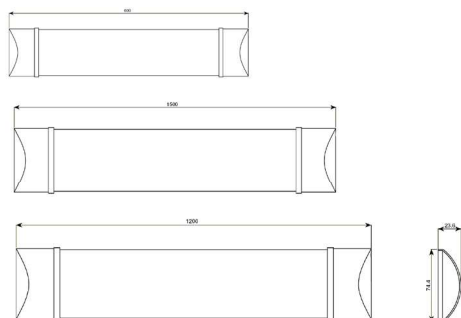

STANDARD	DESCRIPTION
EN 60598-1	Luminaires – General requirements
EN 60598-2-1	Luminaires – Fixed general purpose
EN 61000-3-2	Electromagnetic compatibility (EMC) – Part 3-2: Limits - for harmonic current emissions
EN 61000-3-3	Limits - Limitation of voltage changes, voltage fluctuations and flicker in public low-voltage supply systems, for equipment with rated current ≤ 16 A per phase and not subject to conditional connection
EN 61547	Equipment for general lighting purposes – EMC immunity requirements
EN 55015	Limits and methods of measurement of radio disturbance characteristics of electrical lighting and similar equipment

