

LED BAJO MUEBLE SUPERFICIE SLIM

Características de Producto

- Ideal para bajo, dentro y encima de estanterías de cocina, libros, vitrinas, caravanas y casas móviles.
- Sensor de movimiento para encendido y regulación del nivel de luz. Función de memoria de la regulación.
- Directamente interconectables.
- Vida útil de 20,000 horas
- Cuerpo de aluminio y difusor de PC
- Acabado plata
- Se incluye cable con clavija para conexión a la red
- Cable de alimentación de 1,5m, cable de interconexión de 30cm




Sensor de movimiento ON/OFF y regulación del nivel de luz




CAT NO.	DRIVER	LÚMENES LUMINARIA	POTENCIA	EFICACIA Lm/cW	PESO (kg)	CRI	RANGO TEMP (°C)	L/B VIDA ÚTIL
LUCSS3S5D40	Dimmable	500	7W	65	0,496	>80	-25° to +40°	L70 / B50
LUCSS5S7D40	Dimmable	750	10W	68	0,760	>80	-25° to +40°	L70 / B50
LUCSS6S10D40	Dimmable	1000	14W	65	1,3	>80	-25° to +40°	L70 / B50

Dimensiones

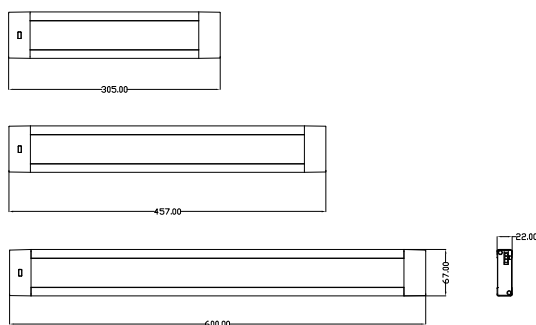

STANDARD	DESCRIPTION
EN 60598-1	Luminaires – General requirements
EN 60598-2-1	Luminaires – Fixed general purpose
EN 61000-3-2	Electromagnetic compatibility (EMC) – Part 3-2: Limits - for harmonic current emissions
EN 61000-3-3	Limits - Limitation of voltage changes, voltage fluctuations and flicker in public low-voltage supply systems, for equipment with rated current ≤ 16 A per phase and not subject to conditional connection
EN 61547	Equipment for general lighting purposes – EMC immunity requirements
EN 55015	Limits and methods of measurement of radio disturbance characteristics of electrical lighting and similar equipment

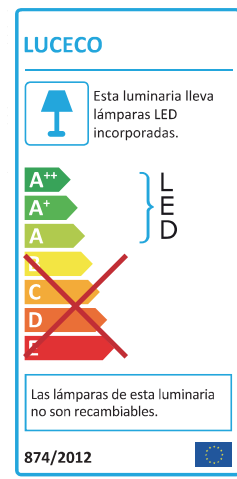

RoHS

