


DEHUMIDIFIER

DH 26



FUNCTIONING DIAGRAM

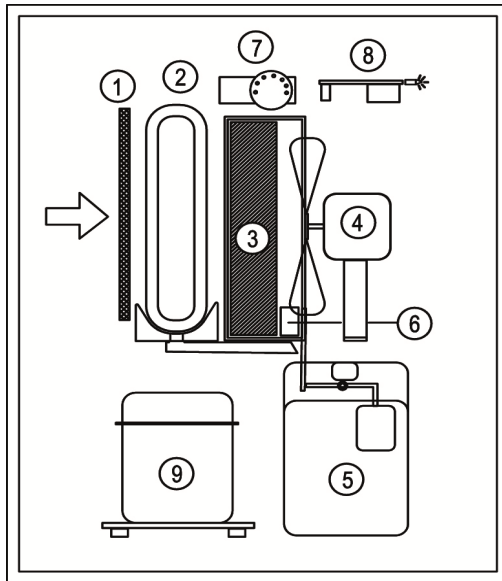

1	:	Filter
2	:	Evaporator
3	:	Condenser
4	:	Fan
5	:	Tank
6	:	Switch
7	:	Moisture gauge
8	:	Electronic board
9	:	Compressor

TECHNICAL DATA

Functioning Relative Humidity Range	%	35 - 99
Functioning Temperature Range	°C	0,5 - 35
Air Flow	m ³ /h	350
Rated Condensation Capacity (30°C UR 80%)	l/24h	26
Type of Refrigerant Gas	type	R410A
Quantity of Refrigerant Gas	g	310
Voltage Power Supply	V	220-240
Frequency Power Supply	Hz	50
Power Consumption (35°C UR 99%)	W	620
Absorbed Current (35°C UR 99%)	A	4,3
Sound Pressure Level (at 3 mts)	dBa	46
Capacity of Condensed Water Tank	l	8
Weight	Kg	36

PACKAGING

Dimensions packing	mm	430 x 430 x 720
Dimensions utilization	mm	450 x 470 x 890
Pieces for Europallet	n°	1
Pieces full truck	n°	450

PERFORMANCE

