


N60/500

Belt driven two-stage compressor.


HERKULES



Two stage pump with cast iron cylinder, equipped with large inter and aftercoolers for better cooling of the compressed air.



Output hose designed to improve air cooling.

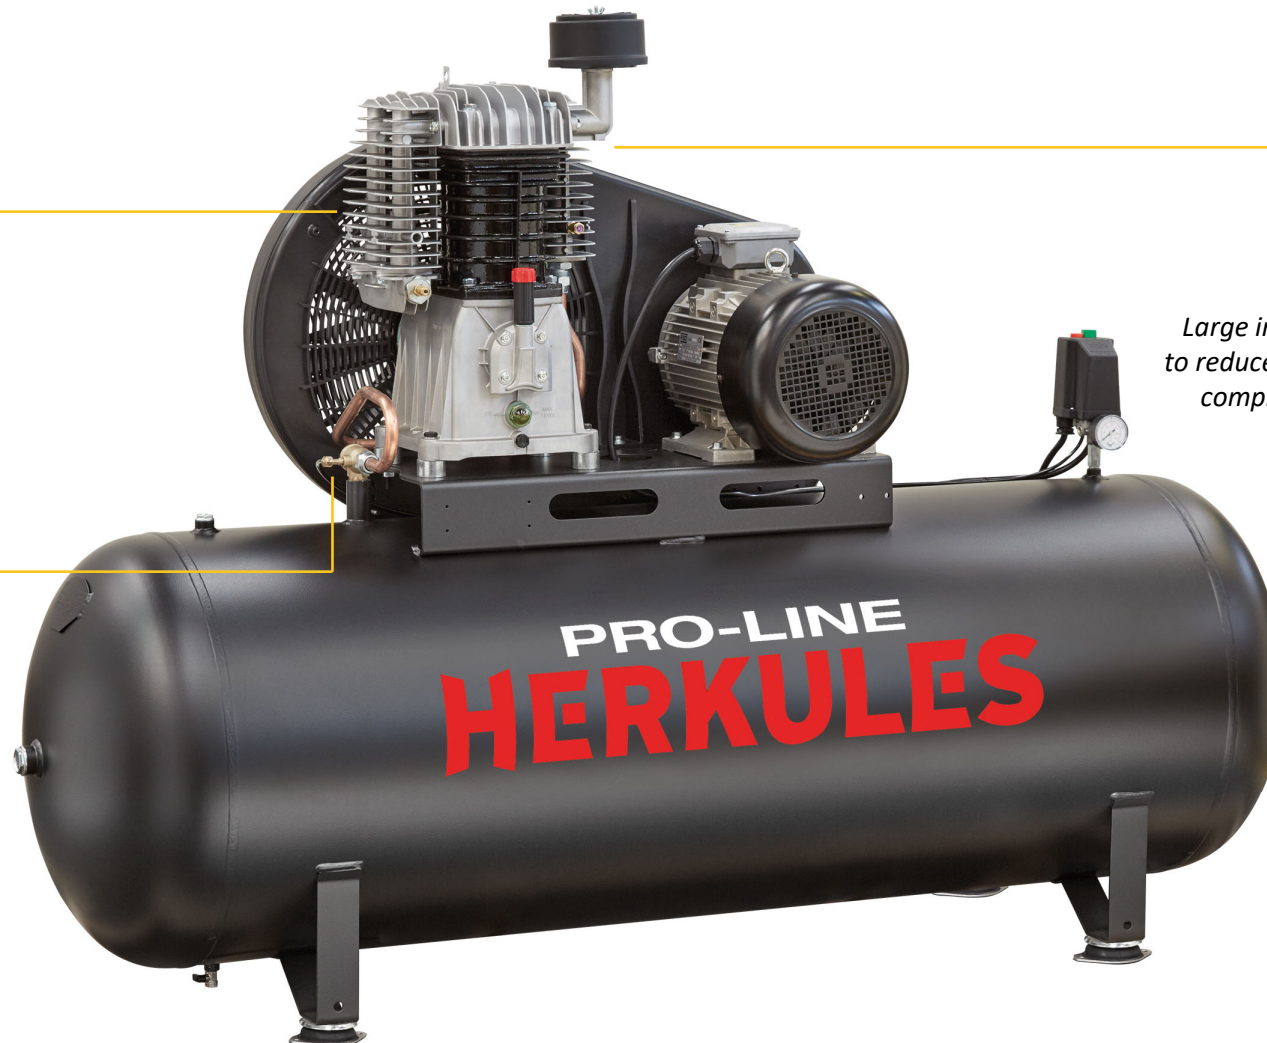

Large intake filter designed to reduce noise and optimise compressor performance.

PRO-LINE
HERKULES

AIR COMPRESSORS

| Code | Pump | Tank | Power | Cylinder | Max Press. | Lubricated | RPM | Theo. Air displacement | Volt/Hz | Weight | Dimensions | Ean code |
|---------------|------|--------|---------------|----------|----------------|------------|------|------------------------|--------------|--------|---------------|---------------|
| 62TC801AFA026 | N60 | 500 Lt | 7,5 Hp/5,5 kW | 2 | 11 bar/160 PSI | YES | 1320 | 850 l/min - 30 CFM | 400Volt~50Hz | 263 kg | 2040x670x1330 | 8016738703528 |